



HEAVY DUTY CHAMBER LESS VACUUM PACKING MACHINE (NOZZLE TYPE VACUUM PACKING MACHINE)

Operational Control Functions

- Digital Control: PLC HMI(Touch Screen) / 10 default programs
- Sensor Control: Set percentage pressure for vacuum and gas functions for accurate and constant packaging results / Automatic programming / 10 default programs / Vacuum plus time
- Liquid Control: Set percentage pressure for vacuum and detect boiling point of the product. For fast cycle and better food protection
- Advanced Control System: Set percentage pressure or mbar/hPa/kpa/mmHg for vacuum and gas function for accurate and constant packaging results / 10 default PLC programs / Vacuum plus time / Sequential vacuum / Secured Operator Access / LCD full color screen Touch Screen / PC interface / Compatible with label printer


Optional Functions

- Service kit for standard maintenance
- Special control options for specific applications

Support Control Functions

- Stop button for partial / full cycle interrupt
- Digital maintenance program for pump / operating hours counter / Service indicator programs / Sleeper functions etc.

Chamber Size

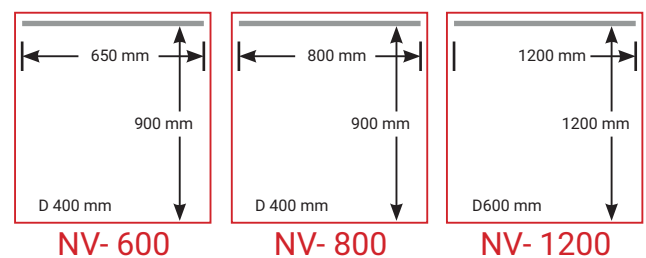

MODEL & PARAMETERS

MODEL	NV-600	NV-650	NV-800	NV-1200
PUMP CAPACITY	16-65m3/h	16-65m3/h	16-65m3/h	16-65m3/h
MACHINE CYCLE	15-40SEC	15-40SEC	15-40SEC	15-40SEC
MACHINE DIM	L990 * W1000 * H1600mm`	L990 * W1000 * H1600mm`	L1100 * W1000 * H1600mm	L1600 * W1100 * H2000mm
NOZZLE	VACUUM & GAS1 -2	VACUUM & GAS1 -2	VACUUM & GAS1 -2	VACUUM & GAS1 -2
VOLTAGE	230V-1PH-50Hz	230V-1PH-50Hz	230V-1PH-50Hz	230V-1PH-50Hz
POWER	1.5KW	1.5KW	1.5KW	1.5KW
WIDE SEAL	1 x 10mm	1 x 10mm	1 x 10mm	1 x 10mm
BI-ACTIVE SEAL	1 x 5.0mm	1 x 5.0mm	1 x 5.0mm	1 x 5.0mm
CHAMBER SIZE	L600 * W900 * D400mm	L650 * W900 * D400mm	L800 * W900 * D400mm	L1200 * W1200 * D600mm

EXPLOSION PROOF (FLP) AVAILABLE

